CONNEXOON TERRACE

somfy

Building happiness

Thank you

for selecting CONNEXOON TERRACE

Need information? Need help?
www.somfy.fr

CONNEXOON

1 BOX, 3 ENVIRONMENTS, 3 APPLICATIONS

CONNEXOON homecontrol®

MAKE THE SWITCH TO CONNECTED MODE

CONNEXOON TERRACE

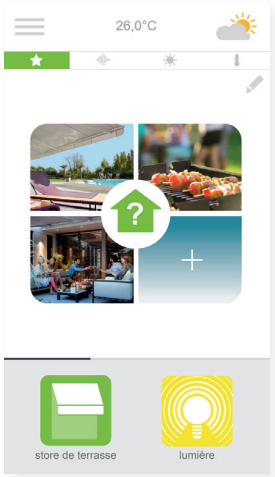

CONNEXOON WINDOW

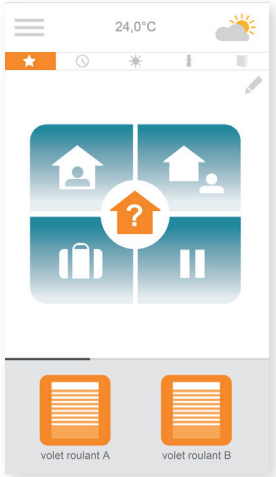

CONNEXOON ACCESS

Three apps to switch your home devices to connected mode

A choice of three apps for control from a Smartphone
Three home life environments: windows - terrace - access.

Enjoy the benefits of being connected to your home and its devices locally or remotely

Unique, **intuitive** and **user friendly functions**, **that are accessible to all**, providing calm and comfort, and enriching your home life.

CONNEXOON

A NEW WAY OF LIVING ON THE TERRACE

Top Functions

Mood creator

Create custom moods. Combine music, lighting, blind or pergola positions to create an infinite range of scenarios.

Snapshot

Store your favourite scenarios in a photo on your Smartphone and recreate them with one click.

Check terrace

Uncertain of the weather forecast? Not sure if the lights are on or off? Check your terrace equipment and adjust it remotely in just one click.

MAKE THE MOST OF YOUR CONNECTED HOME!

Connexoon Terrace is compatible with:

io
Pergola

ioExteriorVertical
Blinds

io Terrace
Awnings

io

io Lighting



io Sunlight
Sensors

PhilipsHueLamp

io Temperature
Sensor

CONTENTS

This contents page is interactive

[1] Connexoon

- The Pack
- The Connexoon box

[2] Installing Connexoon

- Quickly saving io-homecontrol products to the Connexoon box (prog-prog)
- Activating the Connexoon box.
- Downloading the Connexoon application

[3] Using Connexoon Terrace

- The interface
- Controlling my products
- Scenarios
- Check Terrace
- Music
- Managing sunlight intensity
- Managing the temperature

[4] Managing my installation

- Dashboard
- Message centre
- Settings
- My account
- Help

[5] Advanced installation functions

- Connecting io-homecontrol equipment
- Managing the io-homecontrol system key (for installers only)
- Sending the io-homecontrol security key
- Generating the io-homecontrol security key
- Receiving the io-homecontrol security key
- Tutorials available

CONNEXOON

A. THE PACK

1

2



3



4

5

6

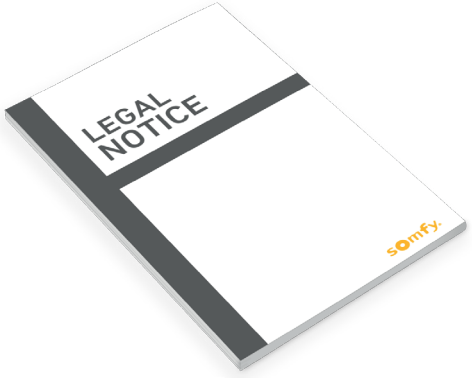

The pack

1. Connexoon box
2. USB charger
3. Mains adapter
4. Ethernet cable
5. 2 Quick installation manuals (installer and end user)
6. Legal disclaimer

< Return to Contents

B. THE CONNEXOON BOX

PROG

Button to quickly pair your Connexoon box with your motorised Somfy equipment, with no internet connection
see page 12 prog-prog pairing of product. (connection that allows communication between the Connexoon box and your equipment)

LAN

Connect your Ethernet cable between your Connexoon box and your ADSL hub.

USB

Connect the USB charger to the USB port on the Connexoon box to power the product.

LED

[2] INSTALLING CONNEXOON

A — Quickly save io-homecontrol products to the Connexoon box (prog-prog)

B — Activate the Connexoon box

C — Download the Connexoon app

Enjoy!

< Return to Contents

A. QUICKLY SAVING

io-homecontrol products to the Connexoon box (prog-prog)

If your equipment to be connected is paired to a remote control with no data feedback (Smoove and Situo):

Pairing can be done without an internet connection and without an active account, by carrying out the simply procedure below.

[1] Plug in the Connexoon box

[2] Press the PROG button on the control point for 2 seconds

[3] Briefly press the PROG button for 0.5 seconds

[4] After saving all your equipment, press the Connexoon box for 8 seconds.
Your equipment will shunt up and then down to confirm that the products have been paired.

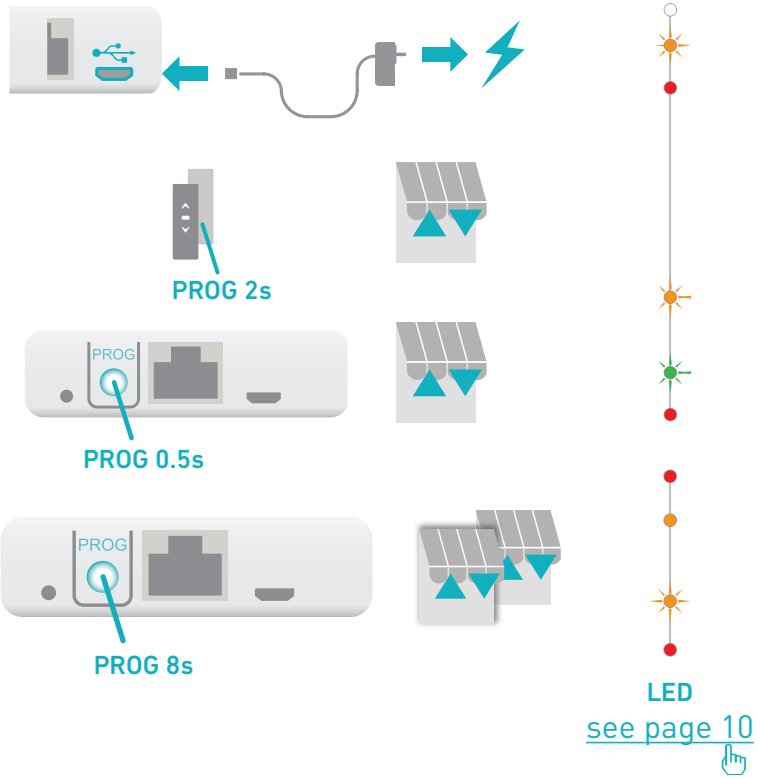

see page 10

If the installation includes a control with data feedback, refer to page 45

< Return to Contents

B. ACTIVATING THE CONNEXOON BOX

Log on to
somfy-connect.com

Step 1

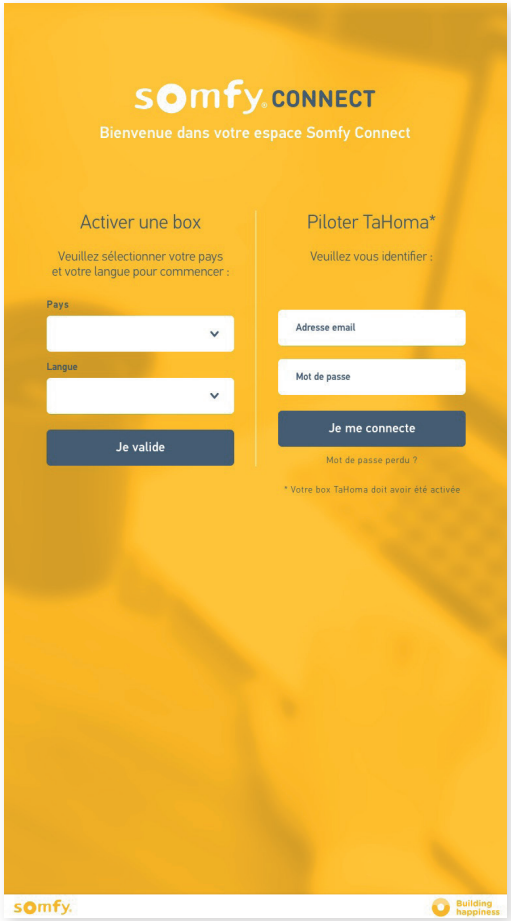

Select your country
and your language in the section
"activate a box"

Step 2

Click on Connexoon

Step 3

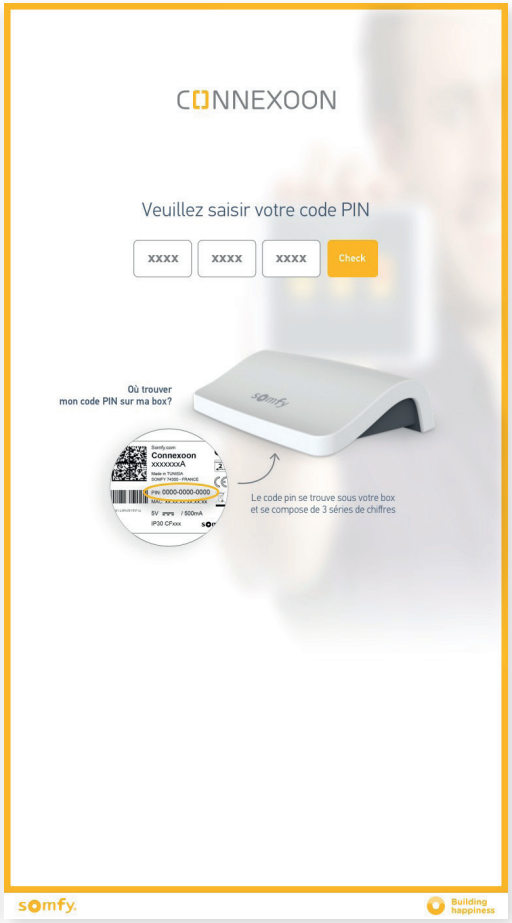

Enter the PIN code
for your Connexoon box

Step 4

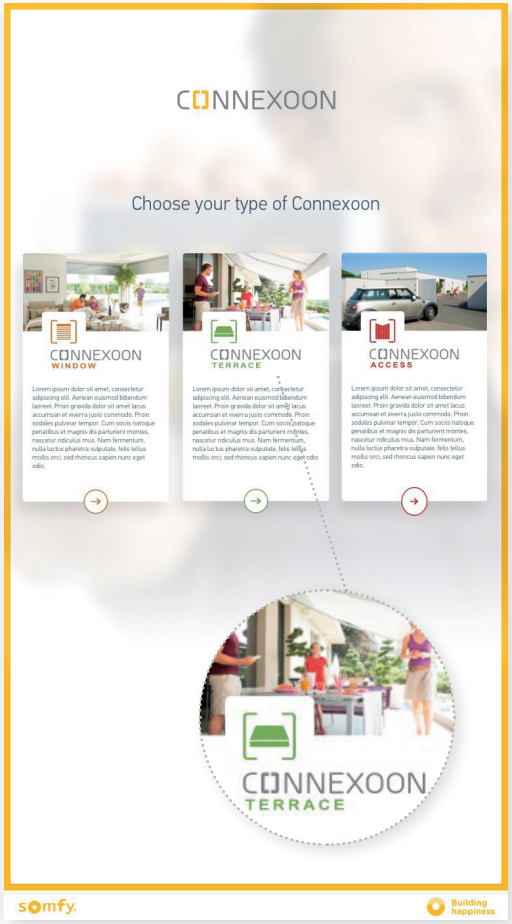

Select Connexoon Terrace

< Return to Contents

B. ACTIVATING THE CONNEXOON BOX

Steps for activating Connexoon Terrace

Step 5

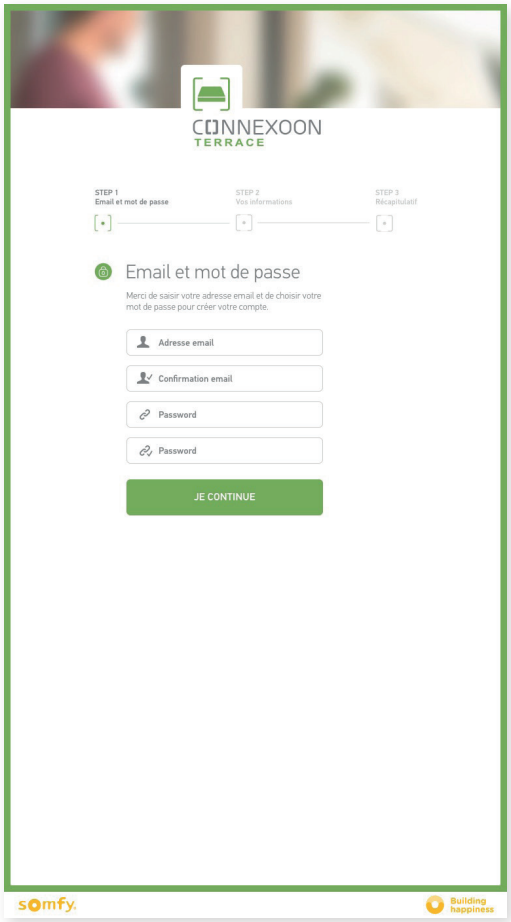

Choose your login and password

Step 6

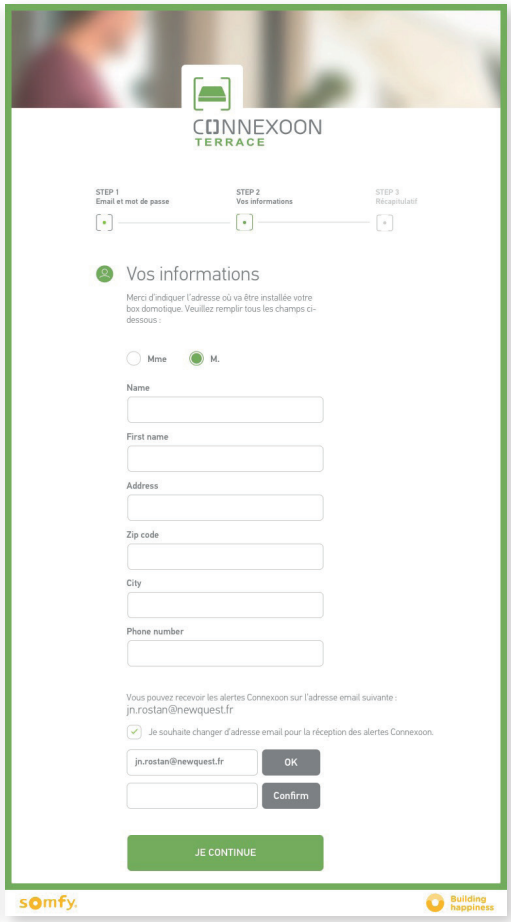

Enter your personal details

Step 7

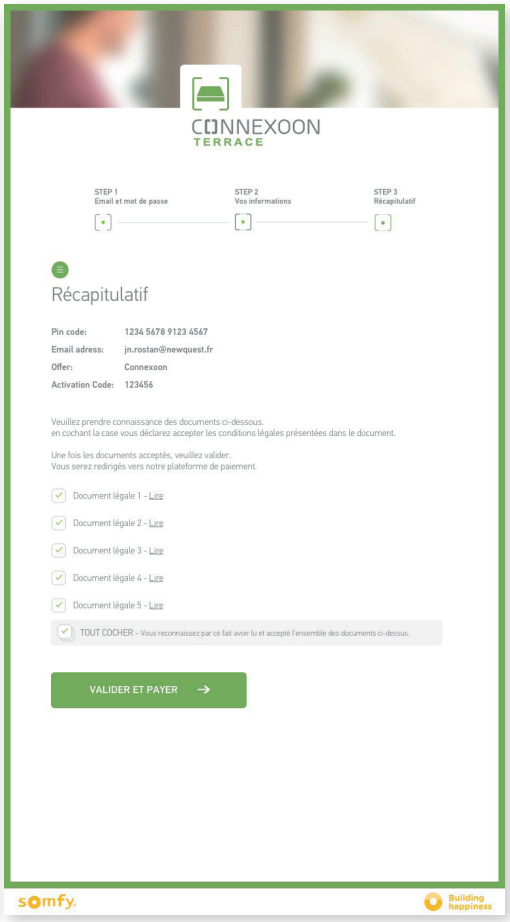

Check your information

Step 8

Confirm

< Return to Contents

B. ACTIVATING THE CONNEXOON BOX

Receiving a confirmation email

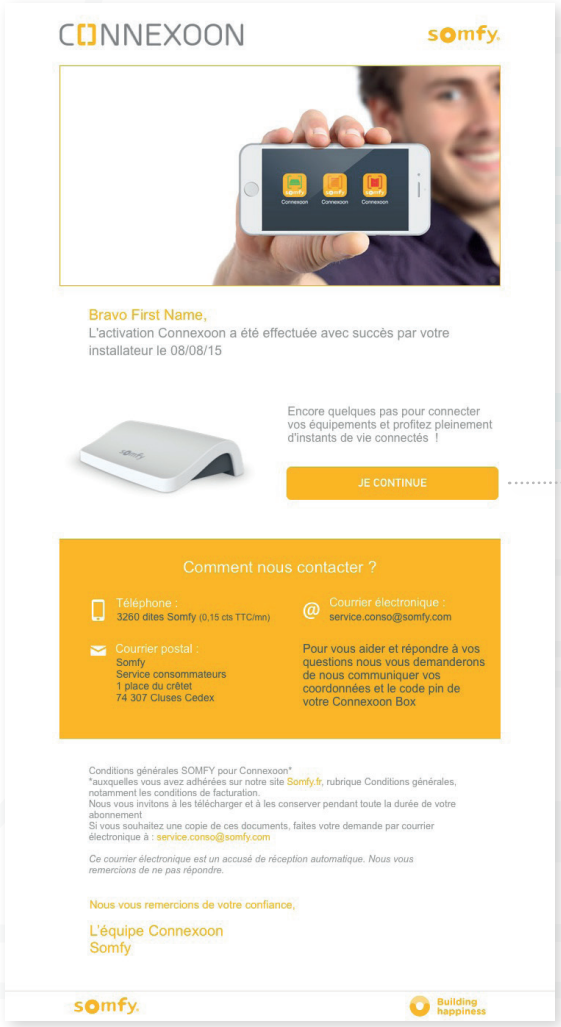

You will receive a confirmation email

Click on the "continue" link to complete activation of the Connexoon box

< Return to Contents

C. DOWNLOADING THE CONNEXOON TERRACE APPLICATION

to your smartphone

Download on the App Store

ANDROID APP ON Google play

Download the Connexoon Terrace
smartphone application available for **IOS** and **Android**.

< Return to Contents

C. DOWNLOADING THE CONNEXOON TERRACE APPLICATION

to your smartphone

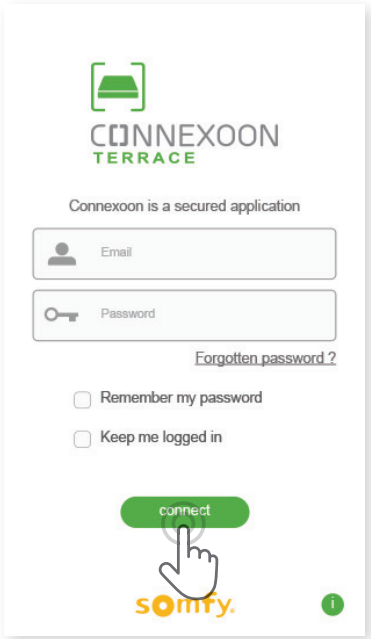

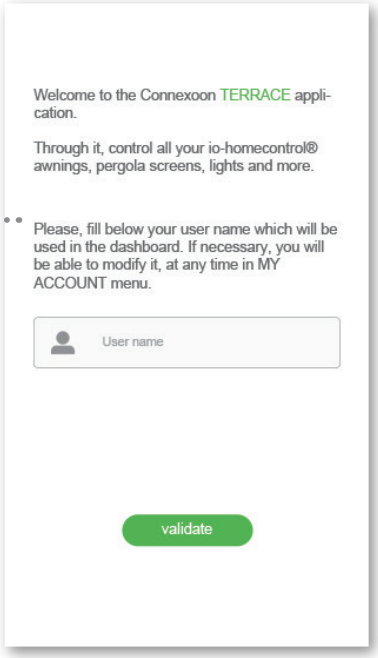

[A] Enter your email address and the password you chose when activating the Connexoon box
(see page 13, Activation screen)

[B] Define your user name. The user name allows you to see what actions have been carried out from your smartphone.

You can change the user name at any time from the "settings" tab of the menu ☰ . This can be found in the history (see page 38, Menu)

< Return to Contents

3 USING CONNEXOON TERRACE

< Return to Contents

A. THE INTERFACE

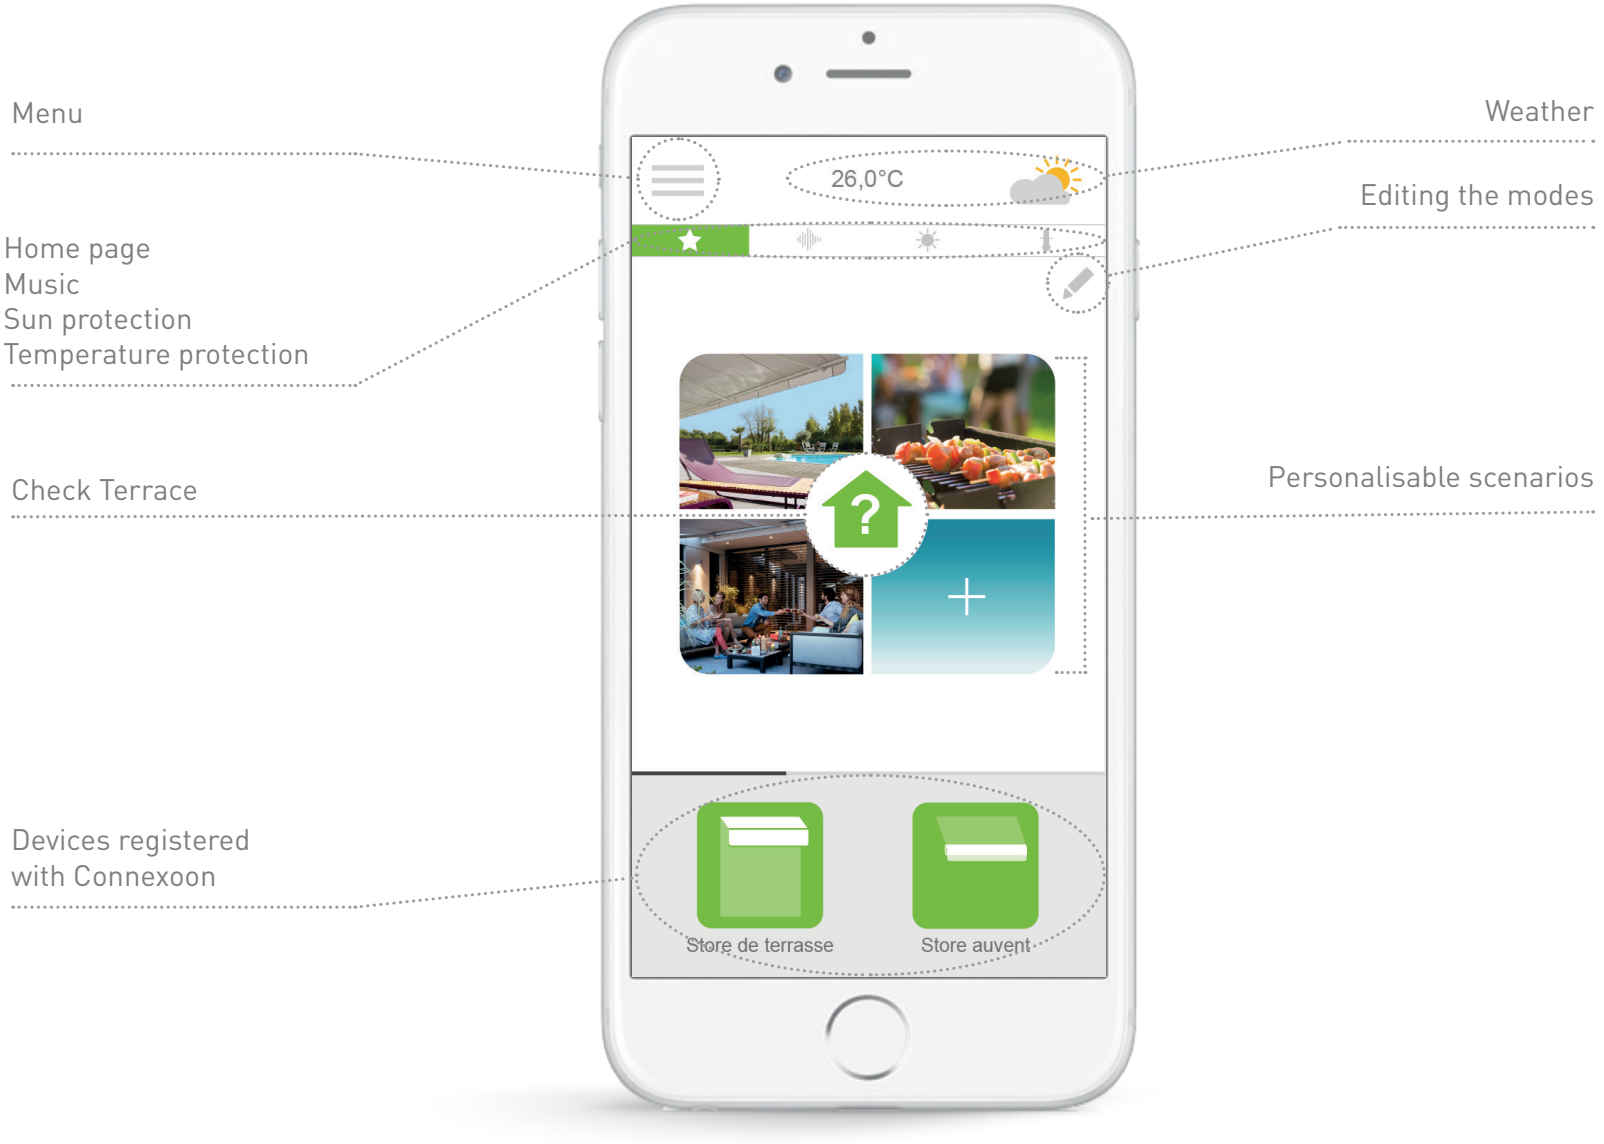

< Return to Contents

B. CONTROLLING MY PRODUCTS

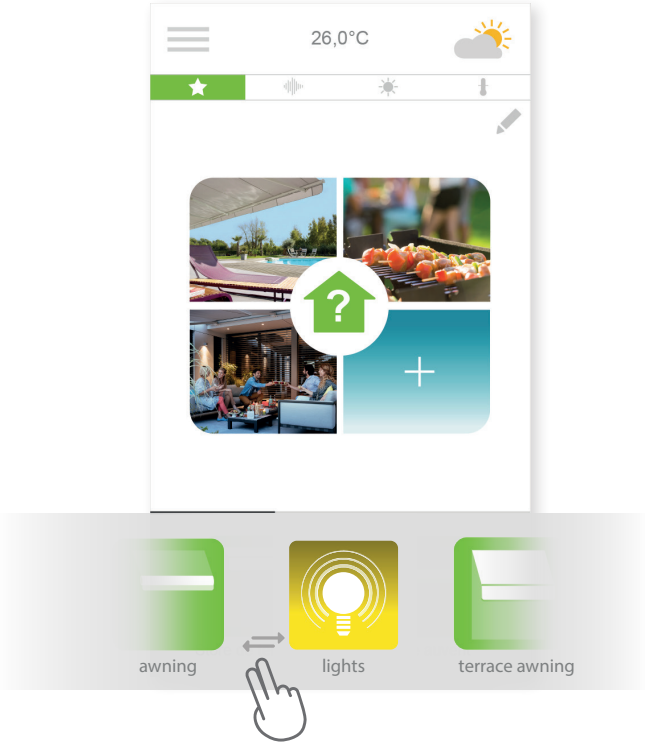

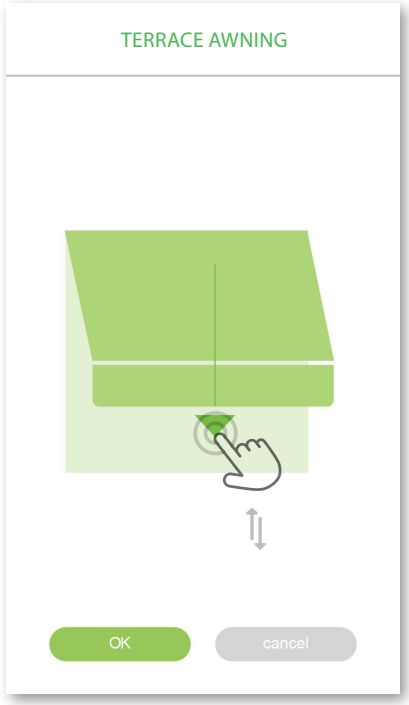

[A] You can control any equipment (awning, pergola, light, etc.) in the grey box at the bottom of your interface.

Swipe the list left or right, then tap the icon for the equipment you wish to control *(for example: the terrace awning).*

[B] Adjust its position using the arrow, then tap OK

< Return to Contents

C. SCENARIOS

The snapshot function allows you to easily save your scenarios.
You can make Connexoon store your scenario using Snapshot.

For example: I'm having a barbecue with my friends, my awning is lowered to mid-height, my pergola is open and my terrace socket is connected.

see TUTORIAL # 2: Snapshot

Building happiness

< Return to Contents

C. SCENARIOS

[A] Tap to edit a mode

or to create a new one.

[B] Take a photo of your connected home life scenario and Connexoon will save the position of your equipment so that you can tap to recreate the moment.

< Return to Contents

C. SCENARIOS

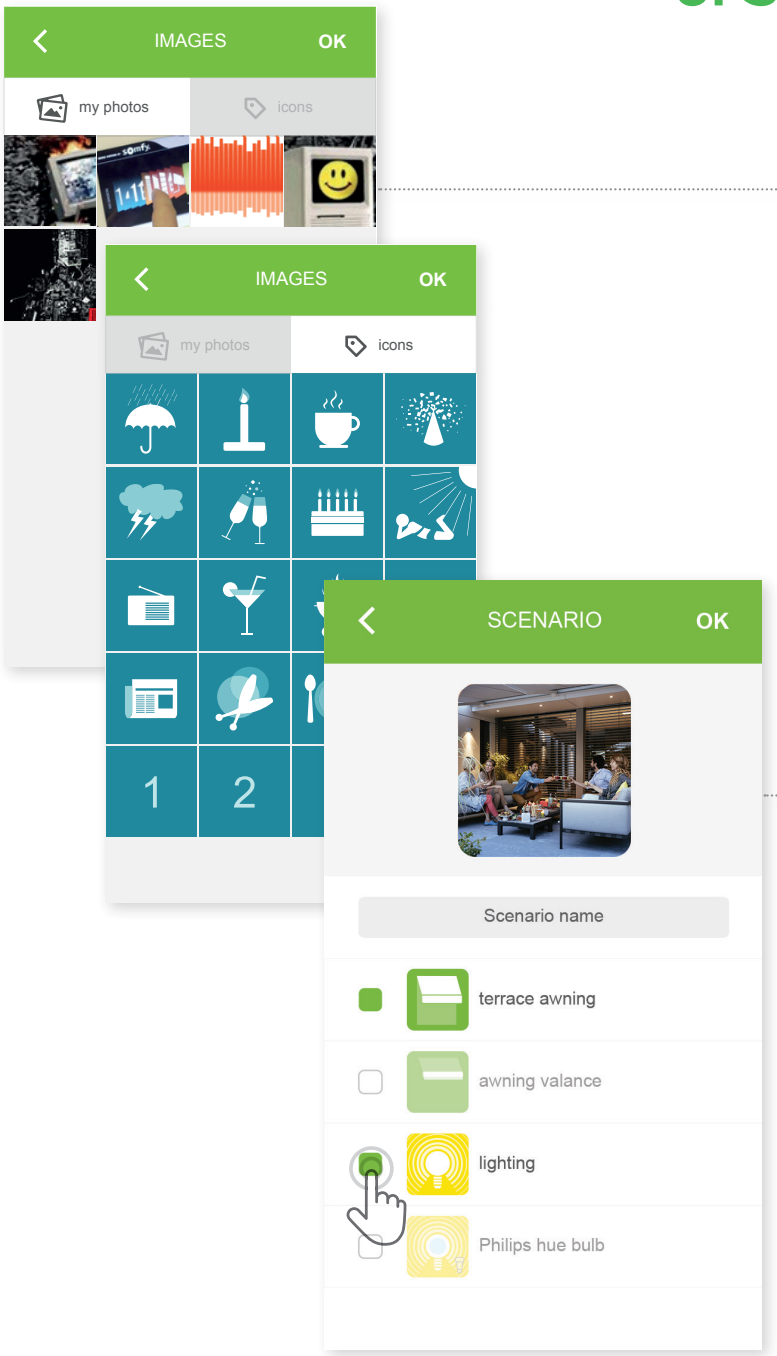

[C] Or select an image/ photo in your gallery.

[D] Select the equipment for which you wish to save a position

< Return to Contents

D. CHECK TERRACE

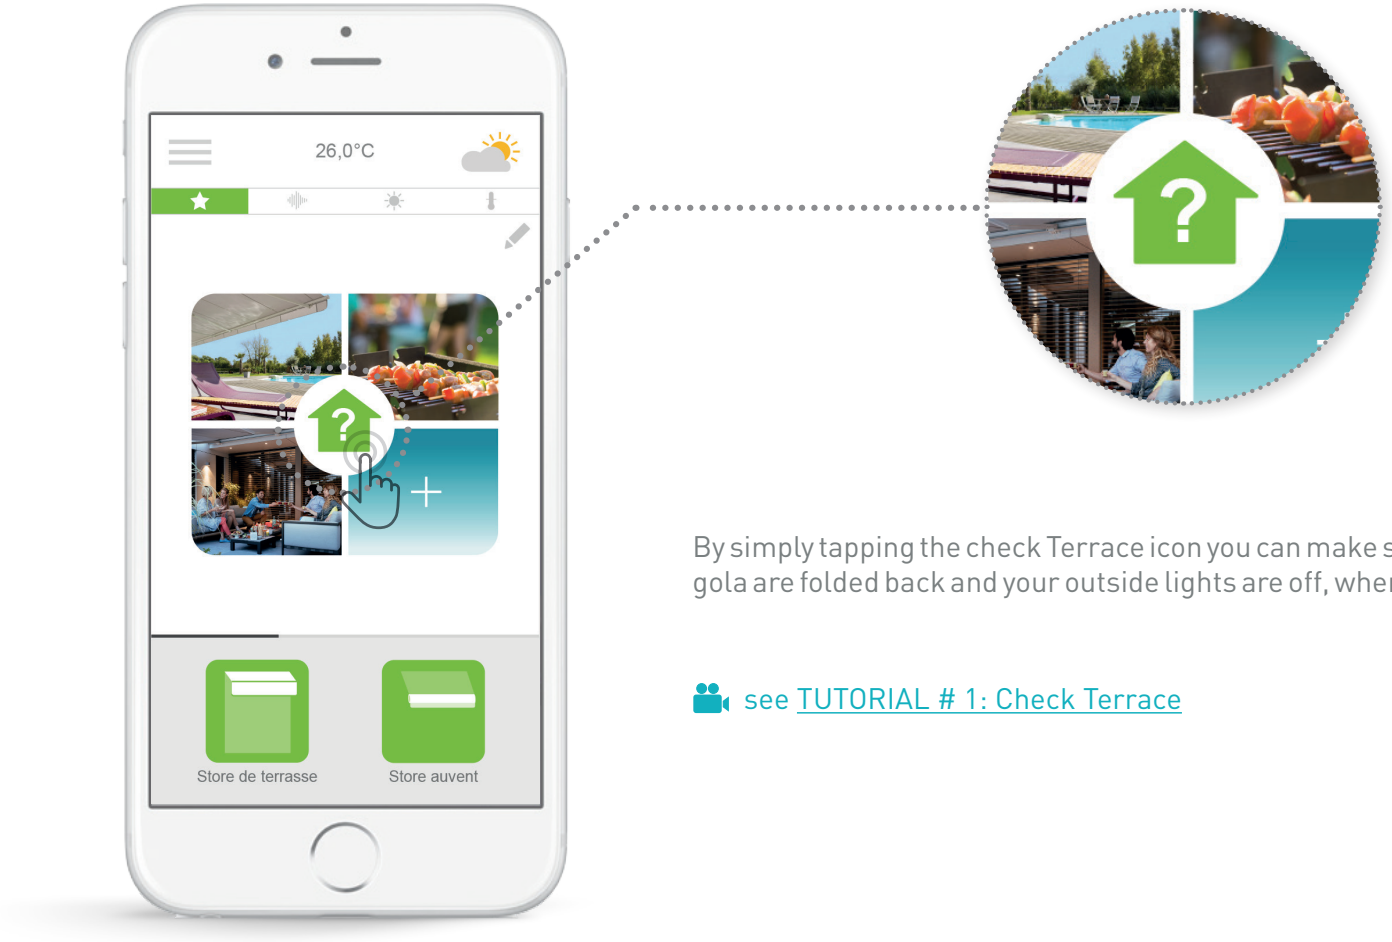

By simply tapping the check Terrace icon you can make sure that your awning and pergola are folded back and your outside lights are off, wherever you might be at the time.

see TUTORIAL # 1: Check Terrace

< Return to Contents

D. CHECK TERRACE

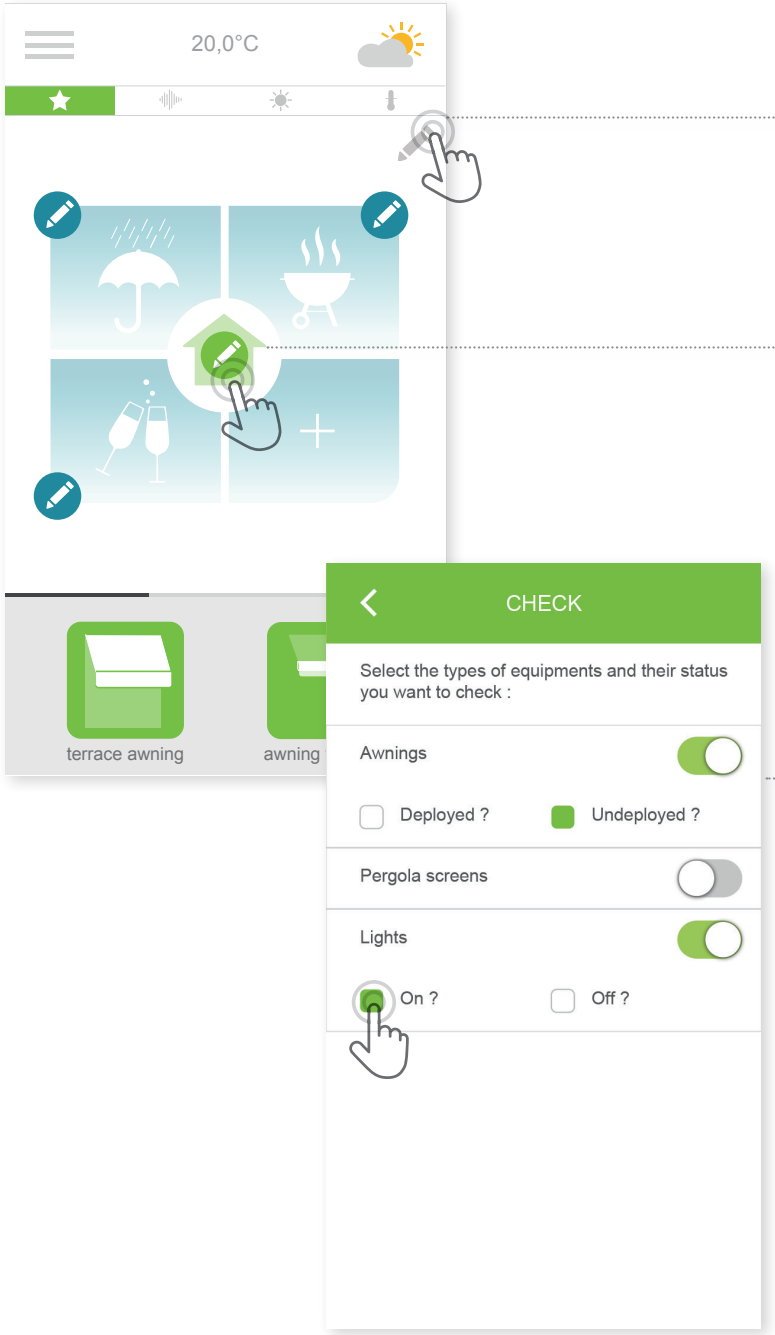

[A] Tap

[B] Tap in the centre of the interface

[C] Select the questions you would like answered by Connexoon when tapping check Terrace

For example, during the day I often want to know whether my terrace awning is lowered and the lights on the terrace are switched off.

< Return to Contents

E. MUSIC

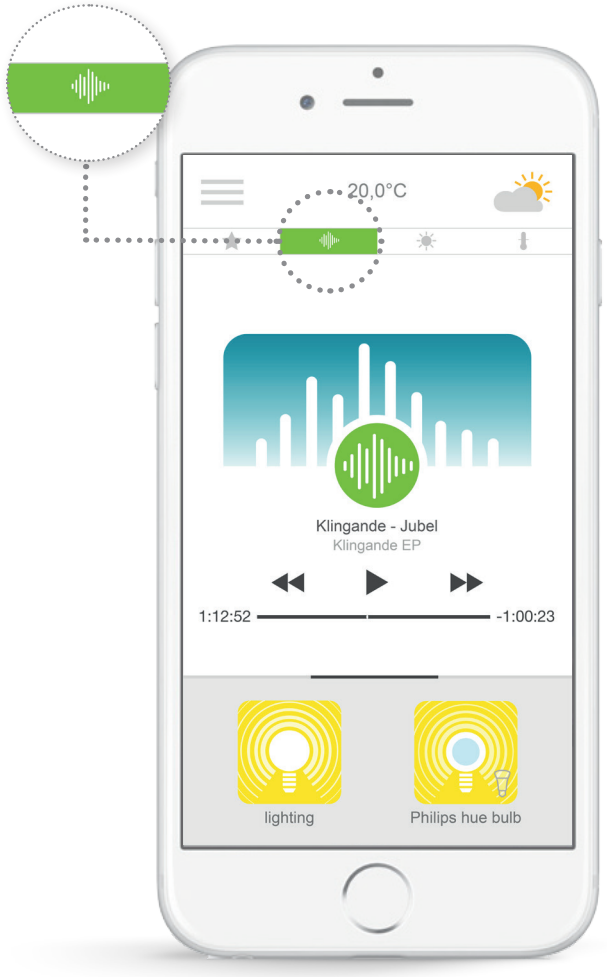

You can play your smartphone playlist at any time using the Connexoon application to make the most of the outdoor experience.

< Return to Contents

E. MUSIC

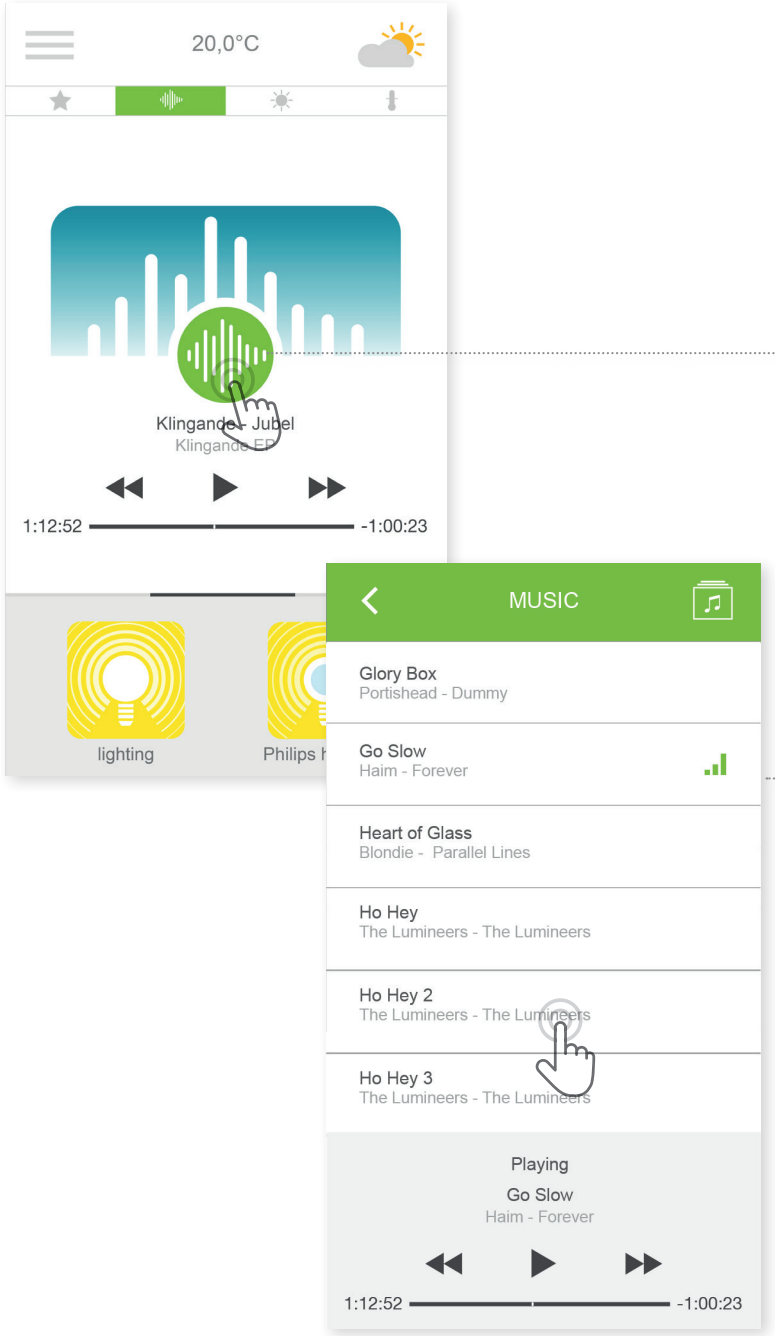

[A] Tap in the centre of the interface

[B] Select the music you wish to listen to.

< Return to Contents

F. MANAGING SUNLIGHT INTENSITY*

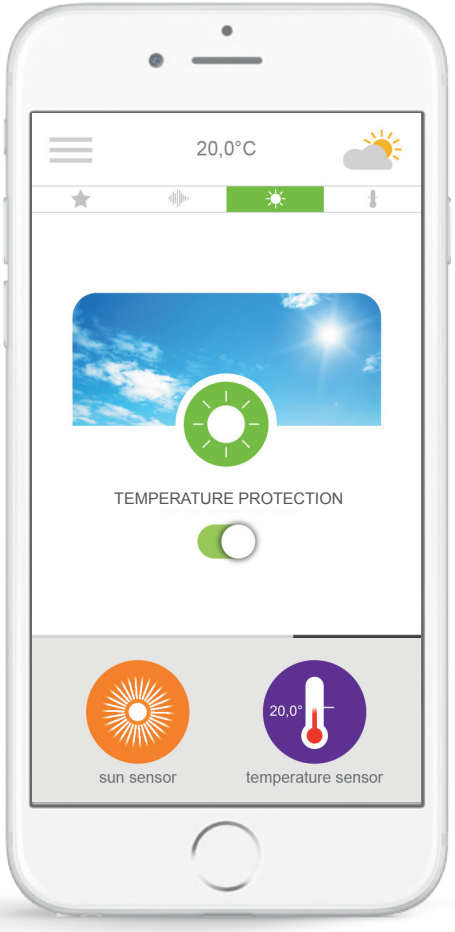

Sun protection* is used to adjust your awning and pergola according to the sunlight intensity.

* only available if you have the Thermis wirefree io temperature sensor

< Return to Contents

F. MANAGING SUNLIGHT INTENSITY*

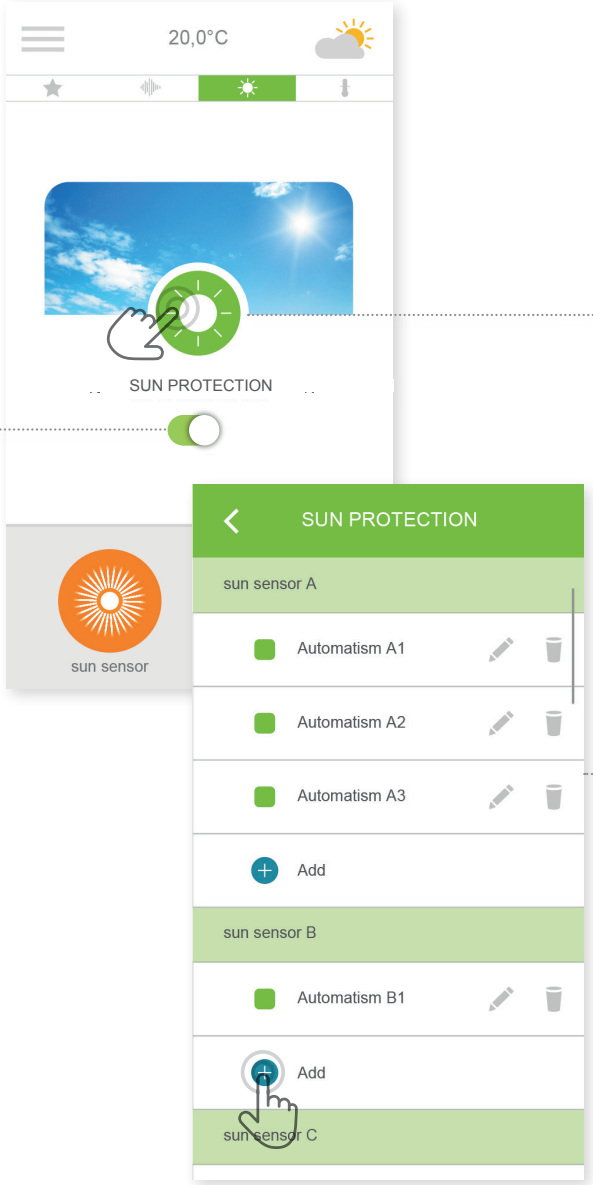

[A] Tap the icon

[B] Tap to create a sunlight scenario

One programme per sunlight intensity threshold,
4 possible programmes per sensor.

< Return to Contents

F. MANAGING SUNLIGHT INTENSITY*

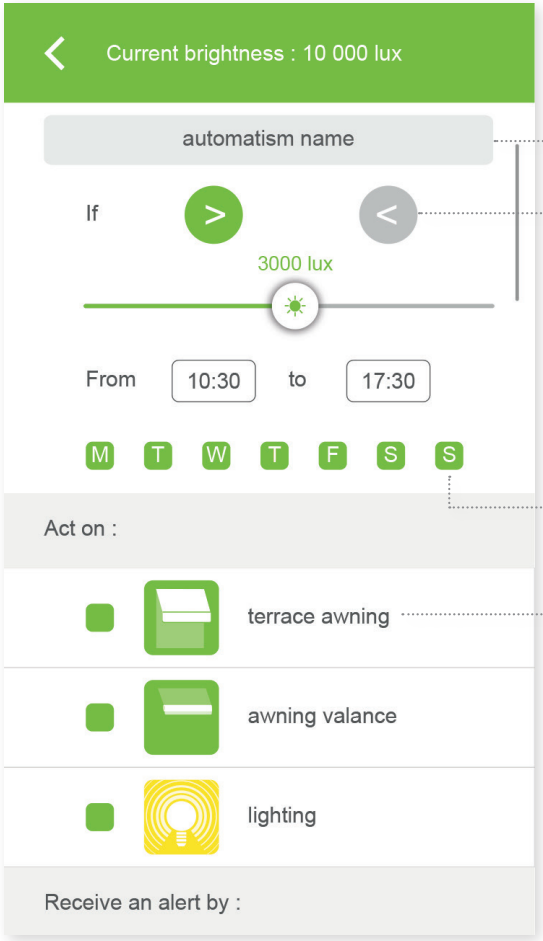

[C] Name your "sun protection" scenario
e.g. Summer sun, winter sun

[D] Define the light level by selecting one of the two conditions:
> "greater than" or < "less than",
then set the trigger threshold by sliding the cursor.
In order to define this threshold, you can refer to the current measured sunlight intensity, which is displayed at the top of the page.

[E] Define the timeslot and the days you wish to apply these conditions to.

[F] Select the equipment you wish to adjust.
Then choose whether or not you wish to be alerted by email and/or push notifications when the programme is started*.

* First activate email notifications and/or notifications in the menu (see page 42)

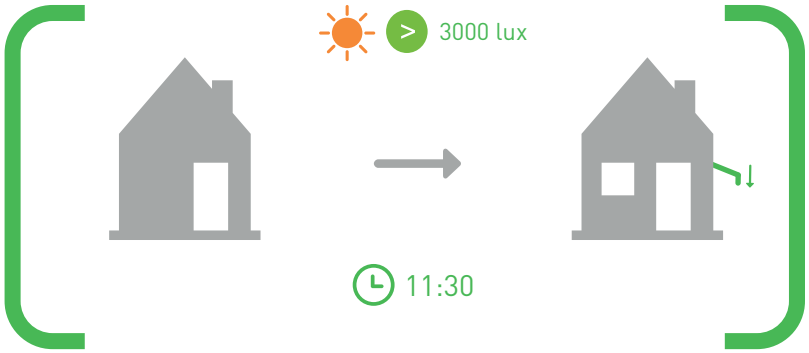

< Return to Contents

G. MANAGING THE TEMPERATURE*

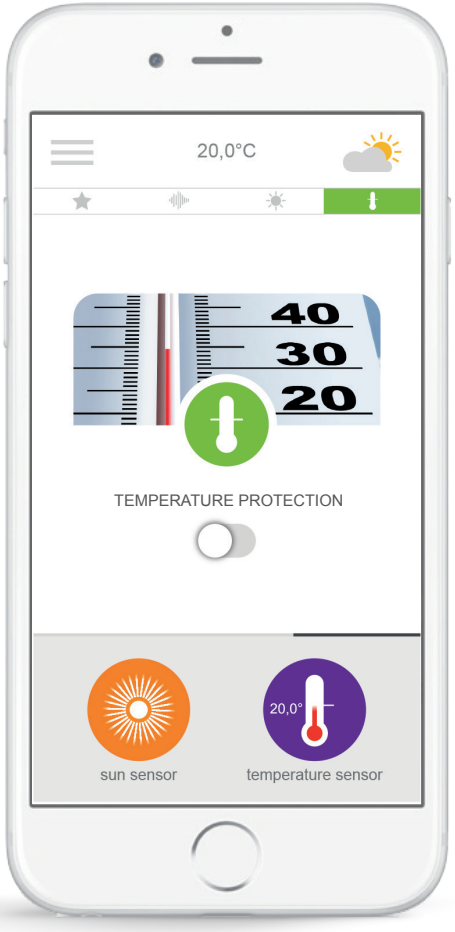

Temperature protection* is used to adjust your awning and pergola based on the temperature.

* only available if you have the Thermis wirefree io temperature sensor

< Return to Contents

G. MANAGING THE TEMPERATURE*

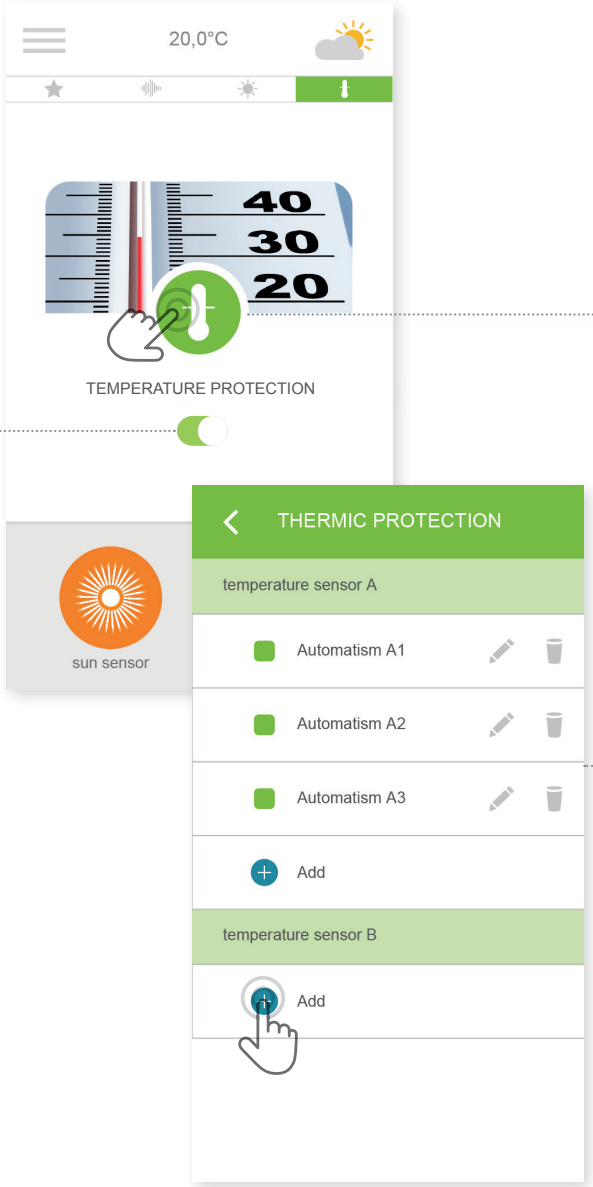

[A] Tap the icon

[B] Tap to create a temperature condition

< Return to Contents

G. MANAGING THE TEMPERATURE*

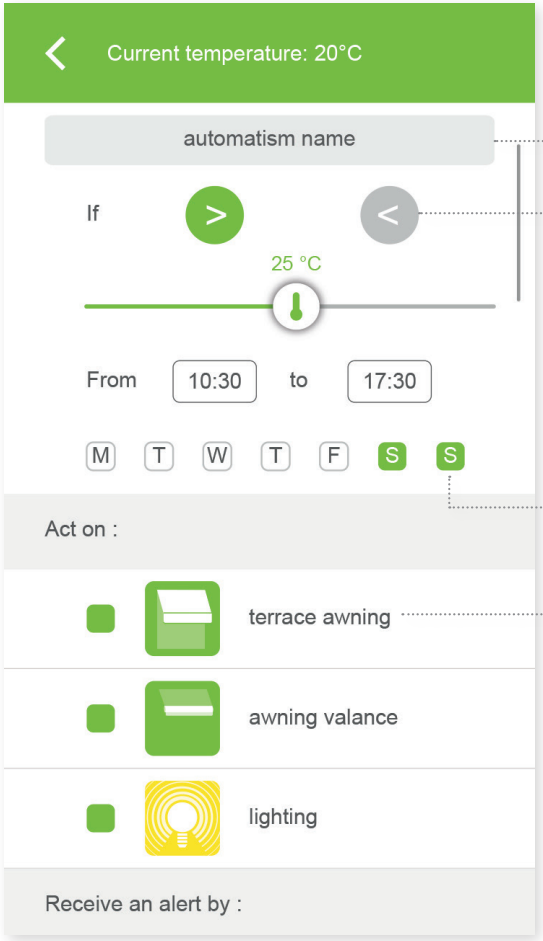

[C] Name your "temperature protection" scenario
e.g. Summer sun, winter sun

[D] Define the light level by selecting one of the two conditions:

> "greater than" or < "less than",
then set the trigger threshold by sliding the cursor.
To define this threshold, you may refer to the current measured sunlight intensity, which is displayed at the very top of the page.

[E] Define the timeslot and the days you wish to apply these conditions to.

[F] Select the equipment you wish to adjust.
Then choose whether or not you wish to be alerted by email and/or push notifications when the programme is started*.

* First activate email notifications and/or notifications in the menu (see page 42)

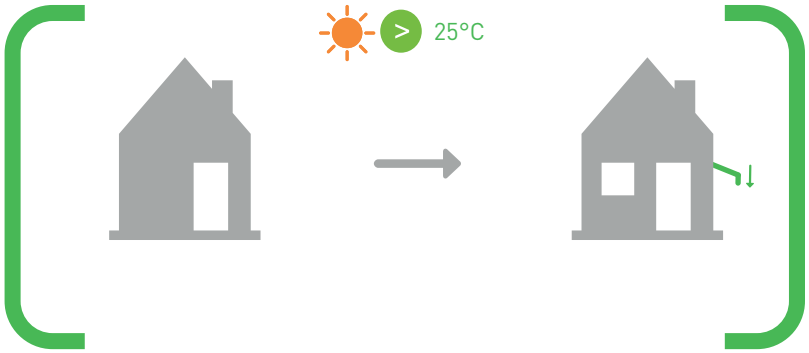

Building happiness

4 MANAGING MY INSTALLATION

< Return to Contents

MANAGING MY INSTALLATION

By tapping ☰ you can access a range of setting and management functions for your Connexoon Home application:

- dashboard
- your message centre
- settings
- your account
- help
- logging out of your application

The "configuration" menu gives you access to the advanced installation functions. (see section 5).

< Return to Contents

A. DASHBOARD

This menu allows you to see the history of all your connected equipment with one click.

- **A green dot** before a command lets you know that everything proceeded smoothly
- **A red dot** indicates that the command was intentionally stopped
- **An orange triangle** indicates that a problem occurred.

Tap the + icon for more information.

< Return to Contents

B. MESSAGE CENTRE

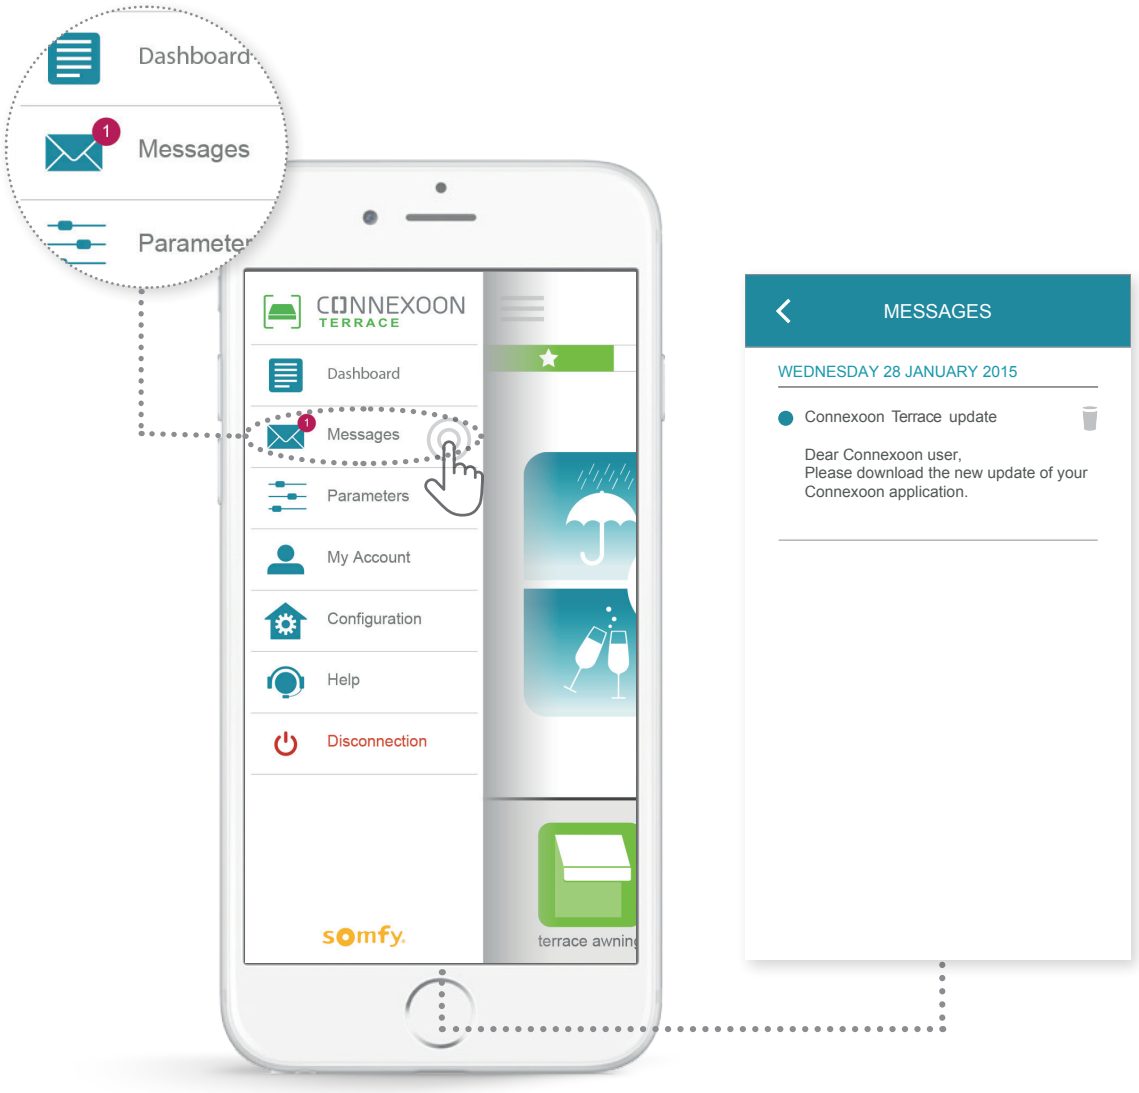

Go to your Connexoon message centre for all information on updates and any forthcoming new features.

< Return to Contents

C. SETTINGS

Add a geolocation for your home to get local weather information

Activate/deactivate the weather forecast display on the home page

Activate/deactivate email alerts

Change your user name

In this menu, you can activate the weather information display and activate email alerts and/or push notifications. It also allows you to display widgets on your smartphone and/or Apple watch, and define your user name in order to personalise **your history.**

< Return to Contents

D. MY ACCOUNT

In this tab, you will find the information you entered when activating Connexoon.

< Return to Contents

E. HELP

You or your installer can add information to this tab so that you can get in contact with the installer directly if you have a query.

Stay in contact with your installer by entering the relevant contact information in the application. You can then call or send a message with just one tap.

The Somfy consumer services number can also be accessed here.

Building happiness

< Return to Contents

5 ADVANCED INSTALLATION FUNCTIONS

< Return to Contents

ADVANCED INSTALLATION FUNCTIONS

In this menu, you can:

- Save new io-homecontrol compatible equipment to your Connexoon
- Delete / Rename equipment
- Manage the io-homecontrol security key for the installation (Note that this function can stop your Connexoon operating correctly, and must only be activated by **your installer**).

To access these functions, tap

< Return to Contents

A. CONNECTING
io-homecontrol equipment

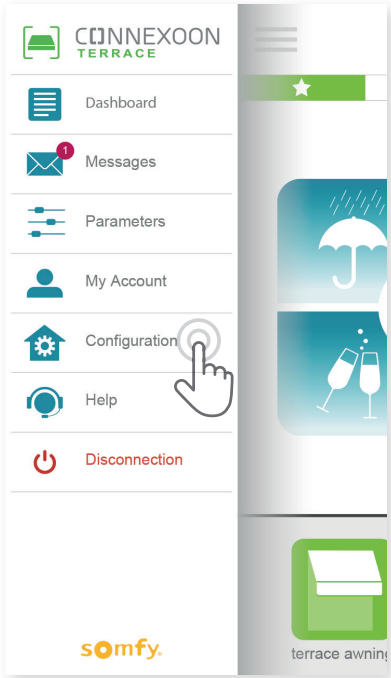

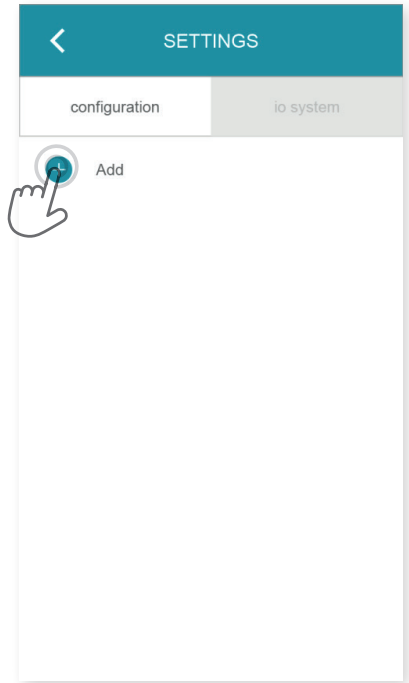

[A] Tap the menu ☰

[B] Tap the configuration tab ⚙

[C] Tap ⊕

< Return to Contents

A. CONNECTING
io-homecontrol equipment

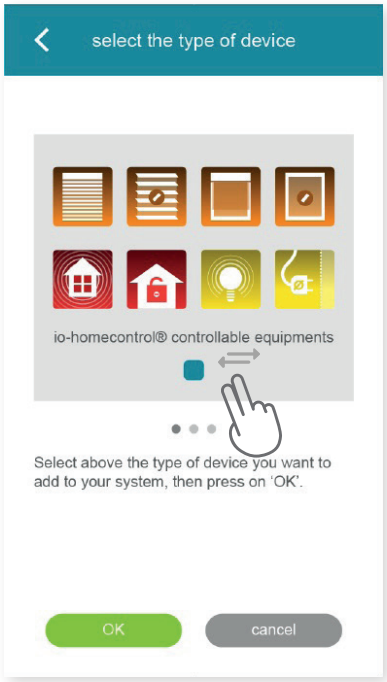

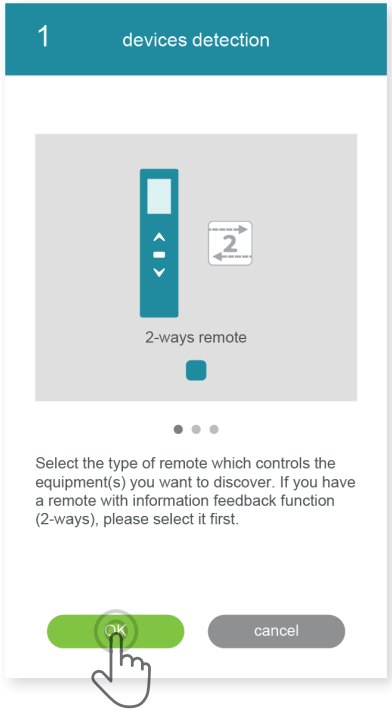

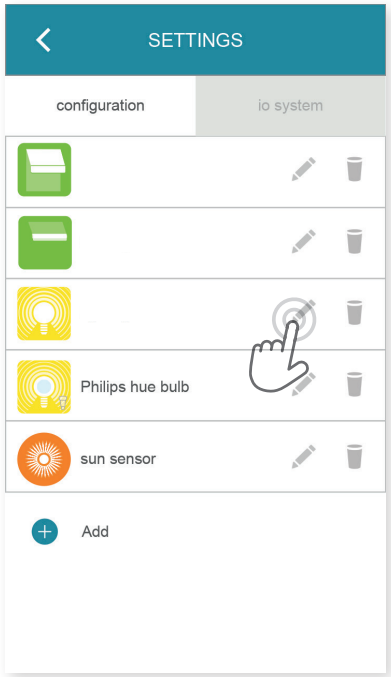

[D] Select the type of product you wish to add to the installation: io motors/actuators, io sensors or detectors or Philips Hue lights, then confirm by tapping OK

[E] Select the control point type (1-way or 2-way) that controls the equipment you wish to connect, then follow the procedure as indicated on the screen to connect the io equipment.

[F] Once the equipment is saved, you can:

- Rename by clicking on
- Delete by clicking on

< Return to Contents

B. MANAGING THE
io-homecontrol security key

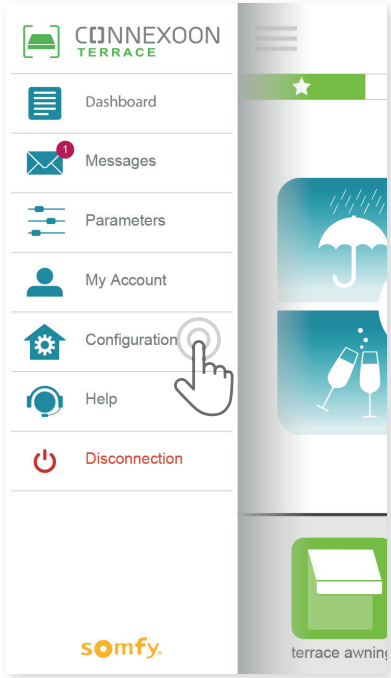

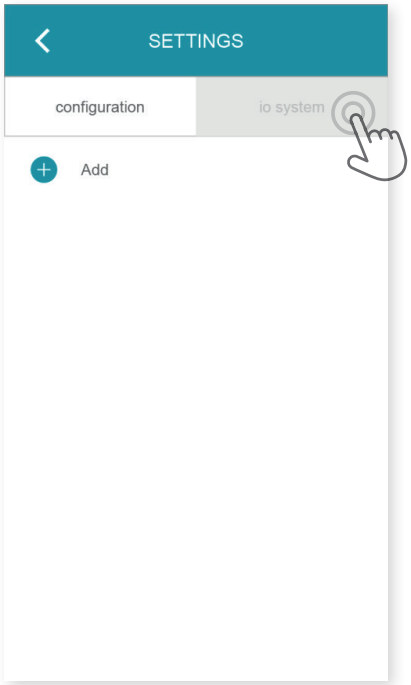

[A] Tap the menu

[B] Tap

[C] Tap the "io system" tab

It is important to ensure that the Connexoon box and all of your equipment and their control points have the same security key.
Use the "io System" menu to manage this key.

Building happiness

< Return to Contents

C. SENDING THE IO HOMECONTROL

security key for the Connexoon box to an io-homecontrol remote control with data feedback (2-WAY)

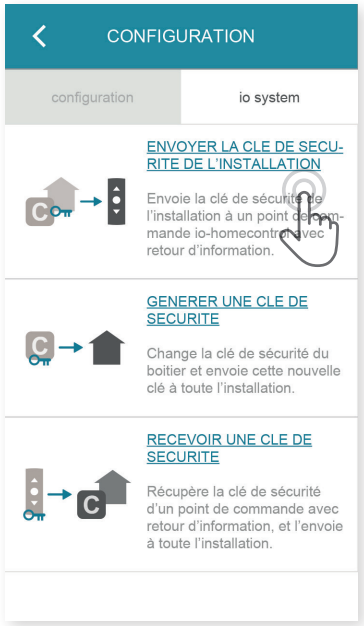

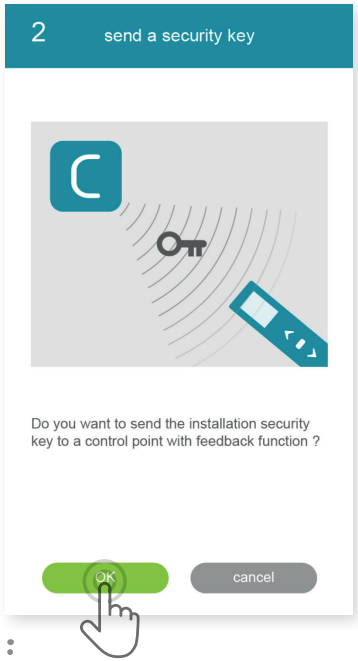

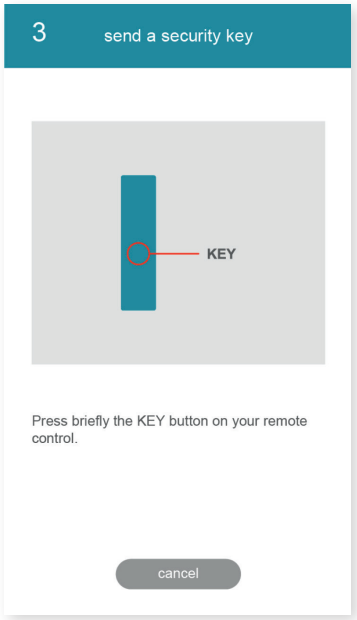

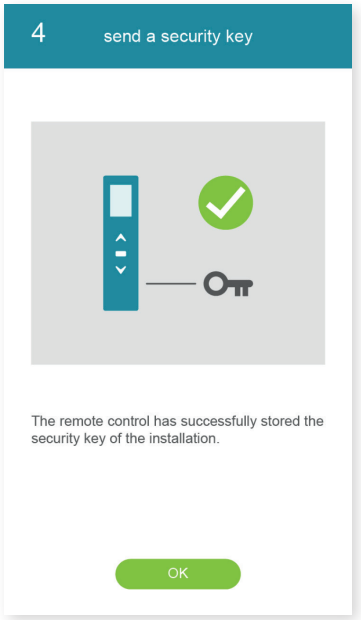

[A] Tap the icon



[B] Tap OK to confirm your selection

[C] Follow the instructions

somfy
Building happiness

< Return to Contents

D. GENERATING THE SECURITY KEY

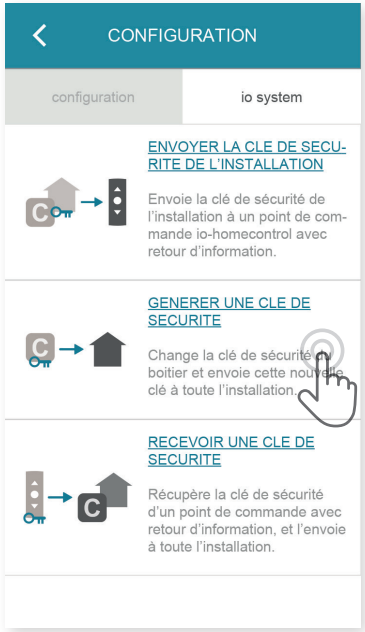

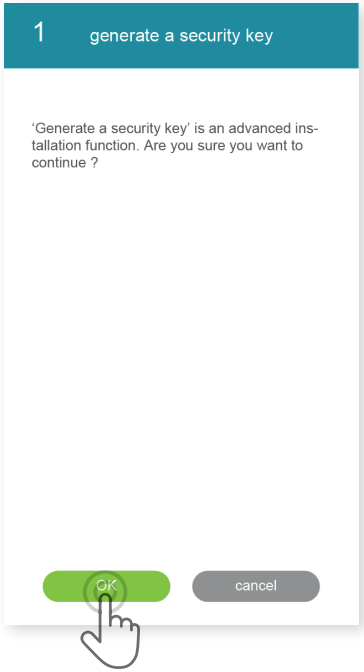

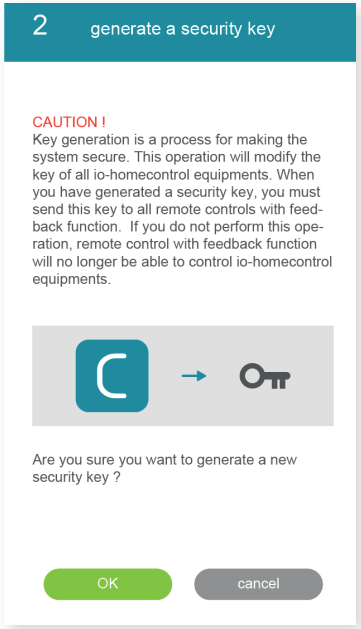

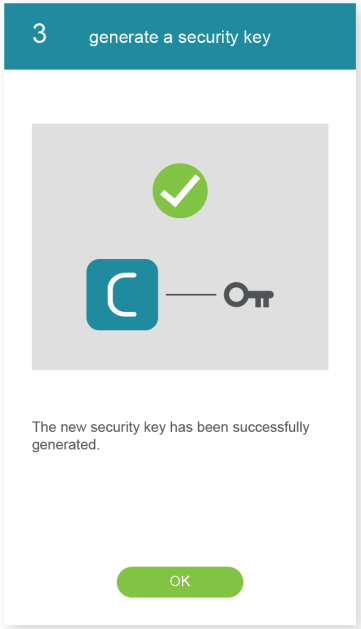

[A] Tap the icon

[B] Tap OK to confirm your selection

[C] Carefully read the precautions for use and follow the instructions

This procedure is used to load the security key for the Connexoon box and its equipment.

somfy
Building happiness

< Return to Contents

E. RECEIVING AN
io-homecontrol security key

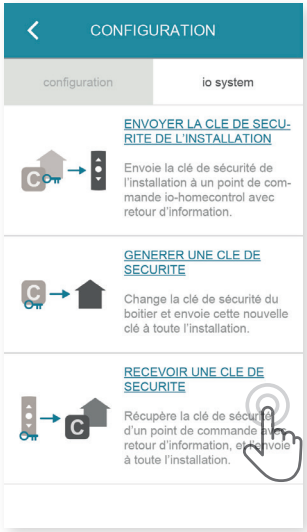

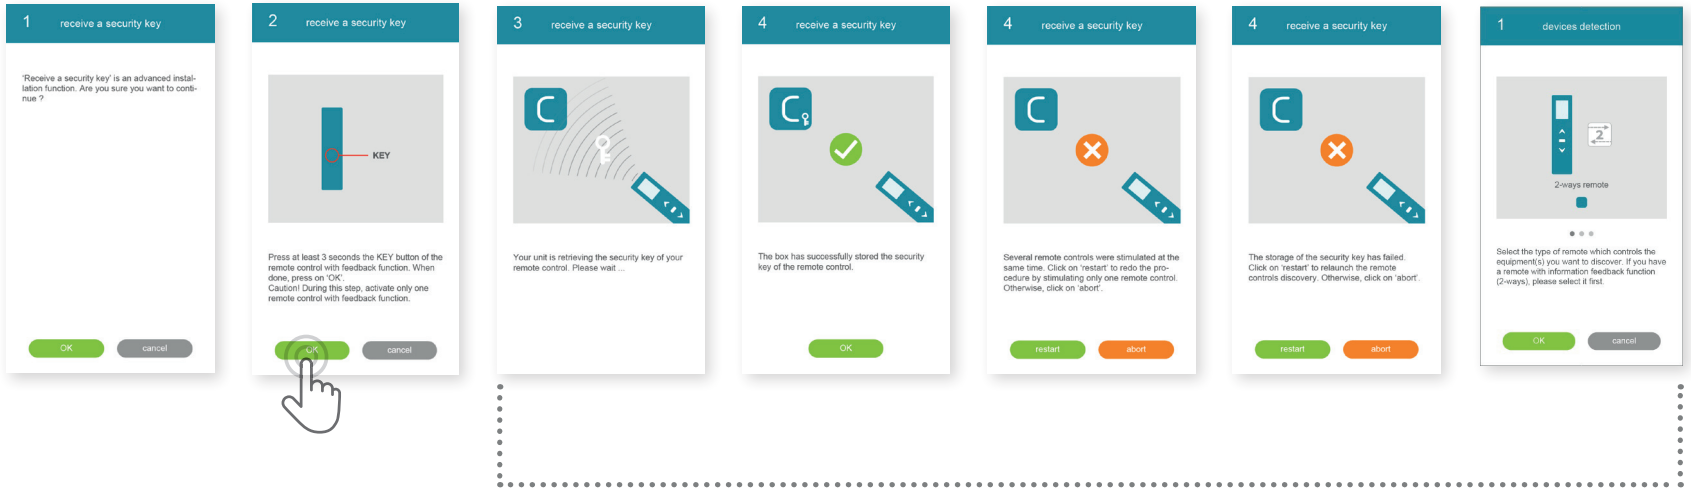

[A] Tap the icon

[B] Tap OK to confirm your selection

[C] Carefully read the precautions for use and follow the instructions

This procedure is used to recover the security key from a 2-way control point, and then assign it to all the equipment and the Connexoon box.

< Return to Contents

TUTORIALS AVAILABLE

List of video tutorials available

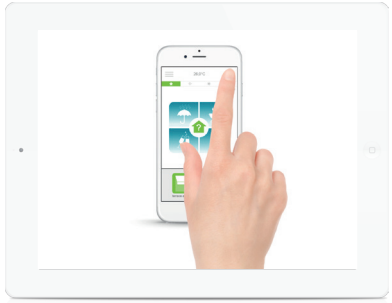

TUTORIAL # 1
Check Terrace

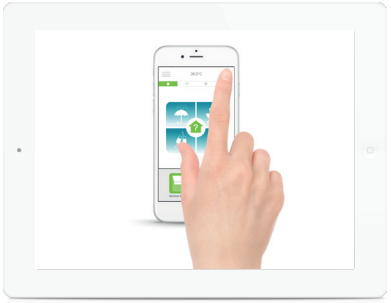

TUTORIAL # 2
Snapshot